

DUPLEX AIR PRO

- Perfect heat & pressure distribution
- Embossment compensation (zips, pockets, buttons...)
- Delivered with 2 membrane plates and 2 aluminum plates of 40x50 cm
- Made for workwear & thick clothes with embossments

User friendly :

- * Foot pedal & bi-manual control
- * Touch screen interface
- * Automatic translation from one plate to another

- Important height between plates
- Ideal for high production
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating plate

- * 180° reversible C-shaped lower part
- * Quick Release system

Hybrid press with membrane plates & aluminum plates




Foot pedal control

Accessories




Support table



Small membrane plate



Set of plates



Nomex® cover



Laser pointer


Technical characteristics

Plates size	40 x 50 cm
Pressure	250 g/cm ² at 4 bars 375 g/cm ² at 6 bars 500 g/cm ² at 8 bars
Weight	171 kg
Max temperature	255°C
Power supply	230 V (single phase + ground)
Electric power	3200 W
Amperage	14 A

Accessories



Table TAB-PRO2 –EXT:
Strong support table with extension on each side. Perfect for SEFA presses.



Small membrane plate PLA-3035 AIRCLAM:
30x35cm membrane plate.



Set of 4 plates PLA-QR:
Useful for precise work.
Dimensions:
12 x 8 cm - 15 x 15 cm
12 x 45 cm - 25 x 30 cm



Nomex® cover HOU-50 :
Heat resistant NOMEX® cover to protect the lower plate and make the threading easier.



Laser pointer CROI-160:
2-laser system to position your transfers with a greater precision. Possibility to add 2 other lasers on the ramp.

Settings



New user friendly touch screen with recipes menus!



Recipes menu with adaptive regulation parameters depending on the job: flex, sublimation on textile, sublimation on rigid substrates, DTG...

Advanced electronics

- 9 recipes menus depending on the job
- Save up to 5 programs PER recipe
- Independent time for each plate
- Double timer (main + pre-heat)
- Cycle counters
- Stop cycle function

From 0 to 600 sec (precision +/- 1%).
From 15 to 255°C (precision +/- 1%).
Heating time to reach 180°C : 10 min.

Dimensions

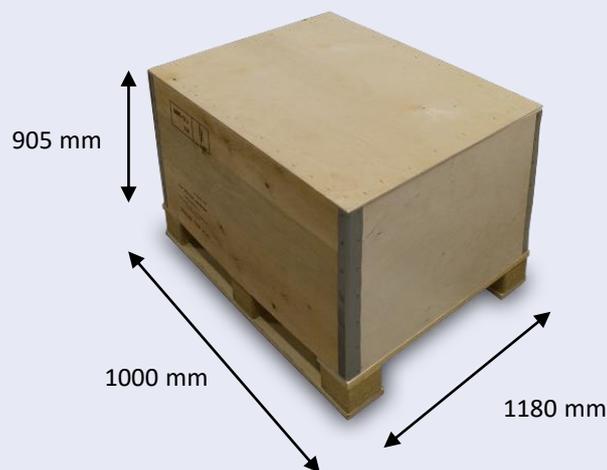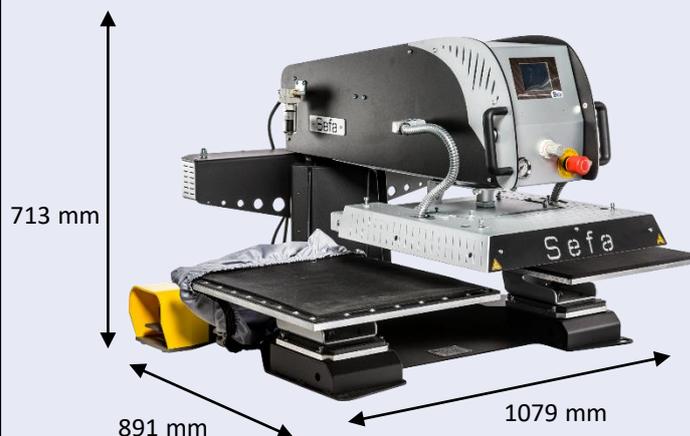

Box weight CAI-DU-PRO : 46 kg