


# DUPLEX PRO LITE / DUPLEX PRO



180° reversible  
C-shaped lower  
part with Quick  
Release system



New touch screen interface

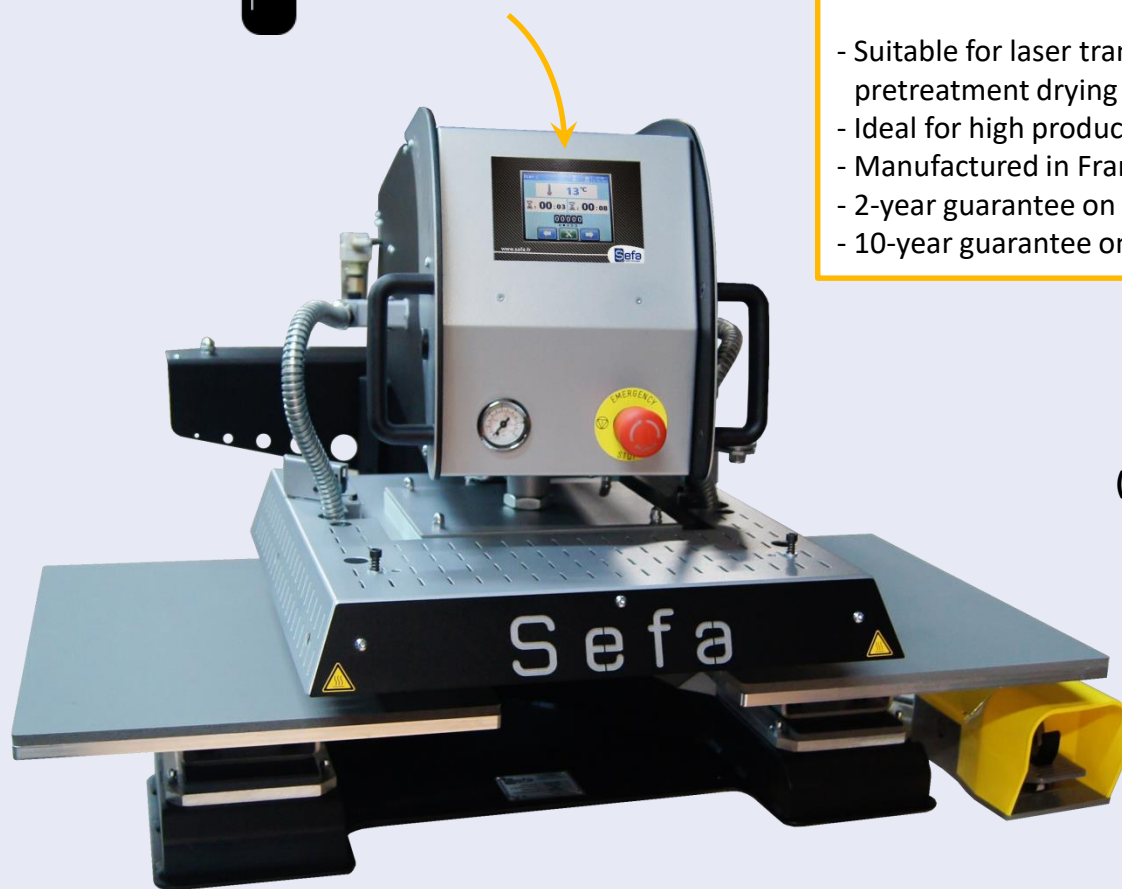

- Perfect heat & pressure distribution
- Double plates of 40x50 cm
- Robust frame
- Important height between plates

#### User friendly :

- \* Bi-manual control (+ foot pedal control on Duplex Pro version)
- \* Touch screen interface
- \* Automatic translation from one plate to another
- Suitable for laser transfer applications & pretreatment drying
- Ideal for high production
- Manufactured in France
- 2-year guarantee on the machine
- 10-year guarantee on heating plate


Foot pedal control  
(on Duplex Pro only)




#### Accessories



Support table



Sponge plate



Set of plates



Nomex® cover



Laser pointer


## Technical characteristics

Plates size	40 x 50 cm
Pressure	250 g/cm <sup>2</sup> at 4 bars 375 g/cm <sup>2</sup> at 6 bars 500 g/cm <sup>2</sup> at 8 bars
Weight	159 kg
Max temperature	255°C
Power supply	230 V (single phase + ground)
Electric power	3200 W
Amperage	14 A

## Accessories




**Table TAB-PRO2 –EXT:**  
Strong support table with extension on each side. Perfect for SEFA presses.



**Plate PLA-DRY M:**  
40x50cm sponge plate to dry pretreated clothes.



**Set of 4 plates PLA-QR:**  
Useful for precise work.  
Dimensions:  
12 x 8 cm - 15 x 15 cm  
12 x 45 cm - 25 x 30 cm



**Nomex® cover HOU-50 :**  
Heat resistant NOMEX® cover to protect the lower plate and make the threading easier.



**Laser pointer CROI-160:**  
2-laser system to position your transfers with a greater precision. Possibility to add 2 other lasers on the ramp.

## Settings



*New user friendly touch screen with recipes menus!*



Recipes menu with adaptive regulation parameters depending on the job: flex, sublimation on textile, sublimation on rigid substrates, DTG...

### Advanced electronics

- 9 recipes menus depending on the job
- Save up to 5 programs PER recipe
- Independent time for each plate
- Double timer (main + pre-heat)
- Cycle counters
- Stop cycle function

From 0 to 600 sec (precision +/- 1%).  
From 15 to 255°C (precision +/- 1%).  
Heating time to reach 180°C : 10 min.

## Dimensions

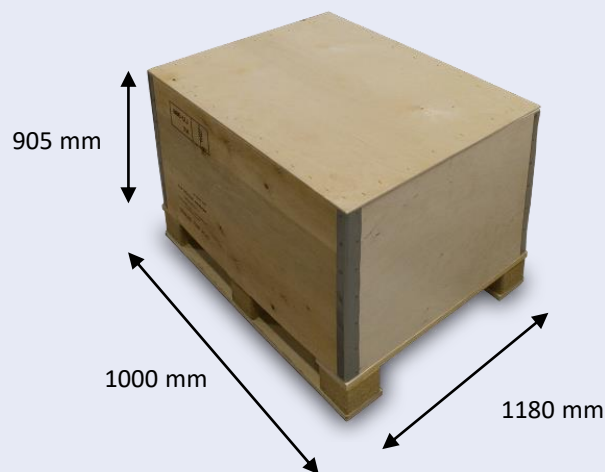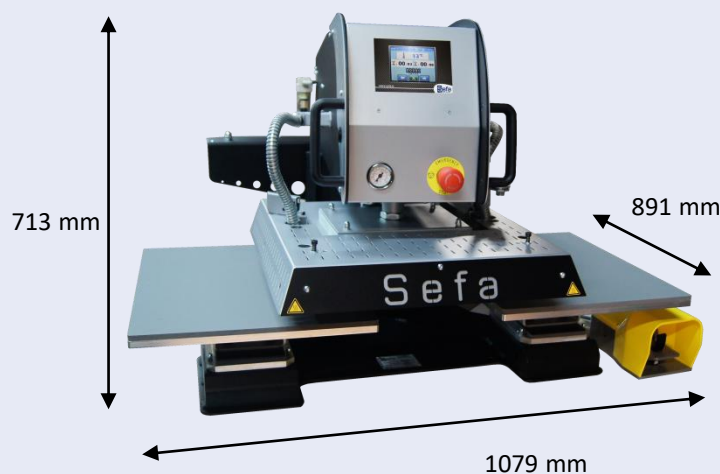

Box weight CAI-DU-PRO : 46 kg